



SIREN SPEAKERS



LBH-100

"Behind the Grill" Speaker

- 100 Watt Output
- 11 Ohms Impedance
- Ultra thin solid cast aluminum construction
- Designed for "behind the grill" mounting
- 750Hz to 2.7KHz operational frequency spectra
- 6.5" Diameter / 2.25" Depth
- Non-fatiguing, self-aligning sound chamber assembly
- Weighs 6 lbs.
- Vehicle specific Ford Crown Victoria & Dodge Charger mounting brackets available - Uniquely designed to increase speaker performance and sound output with simple, easy installation.
- 5-Year limited warranty

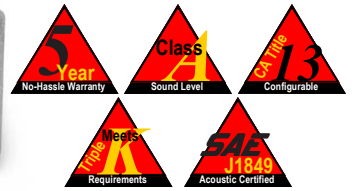

HPG-100N

Versatile Speaker


- Bell constructed of high impact plastic
- 100 Watt Output
- 11 Ohms Impedance
- 450Hz to 3800Hz operational frequency spectra
- 7" Length / 7.31" Width / 5.38" Height
- Non-fatiguing, self-aligning sound chamber assembly
- Patented AS100N driver
- Replacement parts available
- Optional Dual Driver Adapter
- Meets requirements for Class A, Title 13, KKK
- 5-Year limited warranty



CSP-100B

Basic Speaker

- Ultra-compact, hexagonal shape for flexible installation on any vehicle
- 100 Watt Output
- 11 Ohms Impedance
- Integrated, universal mounting bracket design
- Black, corrosion-resistant metal structure
- 400Hz to 3500Hz operational frequency spectra
- 6.34" W x 5.10" H x 2.36" D
- Weighs 6 lbs.
- 1-Year limited warranty

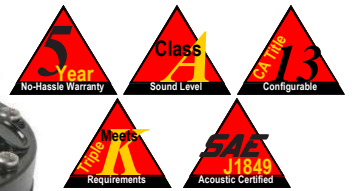

AS100N

Component Replacement

- Accommodates most horns and reflex horns with standard 1.375" - 18 thread pattern
- Neodymium-iron-boron magnet structure
- Heavy-Duty weatherproof construction
- 100 Watt power handling for high intelligibility and sound penetration
- 11 Ohms Impedance
- 4.625" (117 mm) Diameter / 3" (76 mm) Height
- Weighs 5 lbs.
- 5-Year limited warranty

WARNING Sound Hazard - Sound level from siren speaker (>120dB @ 10 feet) may cause hearing damage. Do not operate siren without adequate hearing protection for you and anyone in immediate vicinity. (Ref. OSHA 1910.95 for occupational noise exposure guidelines)

